


# PIPE POSITIONER PRO 508

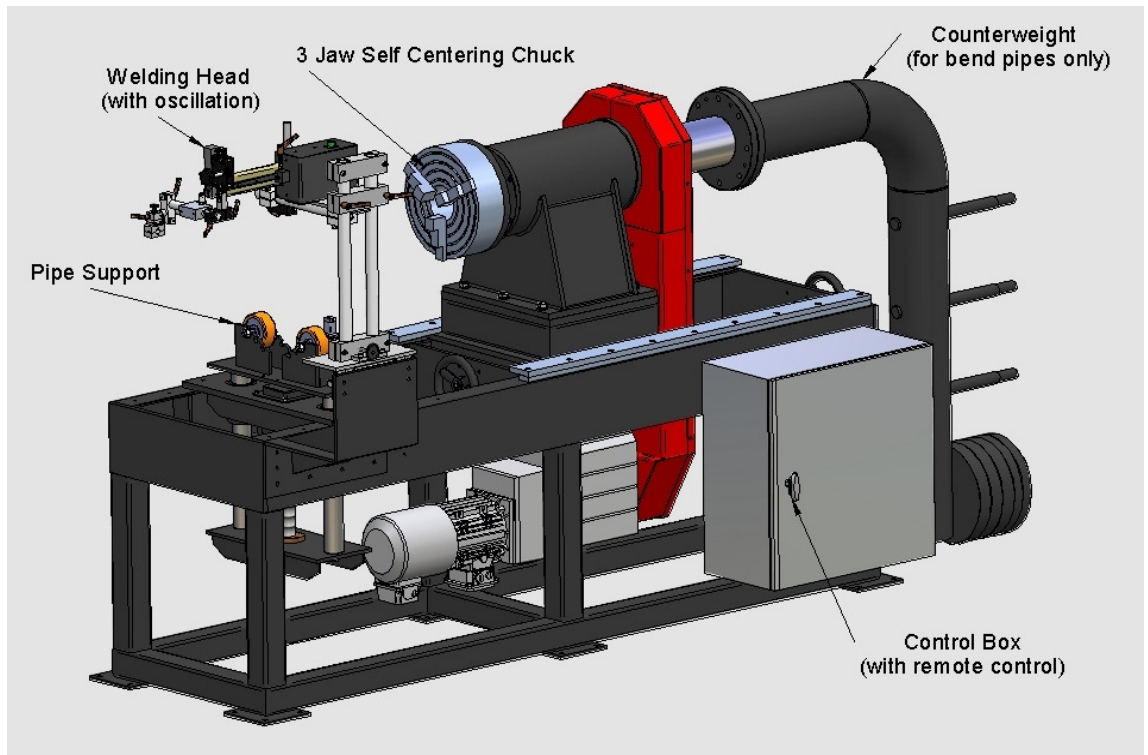

## TECHNICAL DATA:

<b>Load capacity</b>	<b>771 lbs (350 kg)</b>
<b>Rotation speed</b>	<b>0,03 – 3,15 [RPM]</b>
<b>Diameter range</b>	<b>4.5 – 20" (114,3 – 508 mm)</b>
<b>Pipe length</b>	<b>39.5 – 63" (1000 – 1600 mm)</b>
<b>Voltage</b>	<b>3 x 400[V]</b>
<b>Frequency</b>	<b>50[Hz]</b>
<b>Weight (without counterweight)</b>	<b>2360 lbs (1070 kg)</b>
<b>Drive unit</b>	<b>Lenze synchronous 3-phase motorgear</b>
<b>Pipe clamping device</b>	<b>3-jaw self-centering chuck 315</b>

Welding process: MIG/MAG/TIG – to be specified by customer

Control unit: Servo PLC

Welding source: – to be specified by customer

### PROMOTECH Sp. z o.o.

ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND  
tel. (+48 85) 678 34 05, fax (+48 85) 662-78-77  
[marketing@promotech.eu](mailto:marketing@promotech.eu) [www.promotech.eu](http://www.promotech.eu)