PROMOTECH





PRO-45/2 ATEX | PNEUMATIC DRILLING MACHINE

PRO-45/2 ATEX is a small portable pneumatic drilling machine which allows cutting holes up to 45 mm (1-3/4") diameter.

Combination of pneumatic drive and permanent magnetic base eliminate the need of electric power supply thus making this machine an ideal solution in many hazardous environments such as oil drilling platforms, petrochemical plants, oil refineries, shipbuilding and petrochemical industry, where electric appliances are prohibited for safety reasons.

Features & benefits:

- intended for use in potentially explosive atmospheres
- · no need for electric power
- strong permanent magnet base
- · great safety features
- · protection against motor start-up when magnetic base is not activated
- 2-gear box

PRO-45/2 ATEX conforms to ATEX II 2 G/D c IIC T6/T4 Standard for equipment used in hazardous environments







Core dril



Twist drill 20 mm



Depth of cut



Stroke 150 mm



Speed 190 rpm, 290 rpm




Motor Power 800 W



Weight

PRO-45/2 ATEX TECHNICAL SPECIFICATIONS	
Motor speed (under load)	190 rpm (gear I) 290 rpm (gear II)
Motor power	800 W
Weight	26.5 kg (58.5 lbs)
Max milling capacity	45 mm (1-3/4")
Max drilling capacity	20 mm (13/16")
Stroke	150 mm (6")
Max depth of cut	51 mm (2")
Tool holder	19 mm (3/4") Weldon
Air consumption	1400 l/min (50 CFM)
Pressure	6 bar (87 psi)
Air connection	CEJN 410 DN 10.4 R 3/8" BSPT fitting for quick-coupling
Spindle	MT2
Minimum workpiece thickness	10 mm (3/8")
Required ambient temperature	0-40°C (32-104°F)
Magnetic base holding force	765 kgf (7 500 N)
Magnetic base dimensions	80 mm x 80 mm x 143 mm (3.15" x 3.15" x 5.63")
Overall dimensions LxWxH	424 mm x 268 mm x 703 mm 16.7" x 10.5" x 27.7"
Product Code	WRT-0632-10-00-00-0

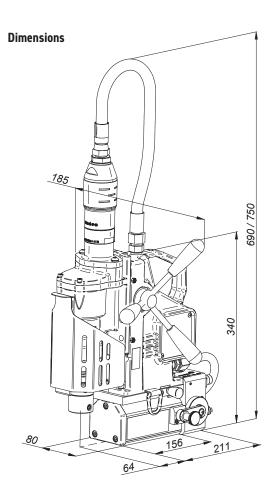

Standard shipping set:

- pneumatic drilling machine
- metal box
- feed handles
- MT2 arbor
- safety chain
- cooling system
- protective spring for cooling hose
- set of tools
- operator's manual













