

OXY-FUEL/PLASMA CUTTING


MODULAR TRACK CARRIAGE

TRACK WELDING & CUTTING

smart tools
for heavy tasks

WELDING & CUTTING TRACTORS

DRAGON



Machine quality cutting and beveling up to 45° with one or 2 torches.



Circle cutting is available as option.



High speed plasma cutting and beveling

DRAGON HS

RAIL BULL 2



Linear oscillation with trapezoid, triangle, square and straight line paths



Ring tracks from 200 mm up to 3000 mm OD



Hi Flex Track min OD 1500 mm



Min. path convex radius 5000 mm



Weight 12 kg

- Continuous welding
- Stitch welding
- Horizontal speed 10-300 cm/min
- Vertical speed 10-300 cm/min

RAIL BULL WITH OSCILLATION



- Continuous welding
- Horizontal speed 0-120 cm/min
- Vertical speed 0-110 cm/min
- Min. path convex radius 5000 mm



Linear oscillation with trapezoid and straight line paths



Weight 20 kg

RAIL TUG




- Continuous welding
- Horizontal speed 10-200 cm/min
- Vertical speed 10-200 cm/min



Ring tracks from 200 mm (8") OD up to 3 m (10 ft) OD



Hi Flex Track min OD 1500 mm



Min. path convex radius for semi-flexible tracks is 5 m (16 ft)



Oxy-fuel/plasma cutting

smart tools for heavy tasks

MULTIPURPOSE TRACK SYSTEM

PROMOTECH is an innovation driven manufacturer of professional power tools and welding automation equipment.

DRILLING



BEVELLING



WELDING



CUTTING



PROMOTECH SP. Z O.O.

ul. Elewatorska 23/1, 15-620 BIAŁYSTOK, POLAND
tel. (+48 85) 678 34 95, fax (+48 85) 662 78 77
www.promotech.eu www.atexdrilling.com
marketing@promotech.eu



PROMOTECH®



www.promotech.eu

WELDING CARRIAGES



Made in Poland according to the highest quality standards



CE-certified



Quality Management System complies with the requirements of ISO 9001:2015

FM 37982



Mitglied im DVS - Deutscher Verband für Schweißen und verwandte Verfahren e. V.



GECKO BATTERY



GECKO HS



- Continuous welding
- Dual torch welding
- Horizontal speed 0-110 cm/min
5-220 cm/min Gecko HS
- Vertical speed 0-100 cm/min
- Min. path convex radius 1000 mm
- Min. path concave radius 1000 mm
- Weight: 8 kg

LIZARD



OSCILLATOR



- Programming device up to 40 welding programs
- Pendulum oscillation
- Continuous welding
- Stitch welding
- Dual torch welding
- Horizontal speed 0-120 cm/min
- Vertical speed 0-110 cm/min
- Min. path convex radius 1500 mm
- Min. path concave radius 1500 mm
- Weight 14 kg

MINI SPIDER



- Continuous welding
- Horizontal speed 0-120 cm/min
- Vertical speed 0-110 cm/min
- Welding in narrow spaces
- Weight 7,6 kg

MULTI-SURFACE GUIDING

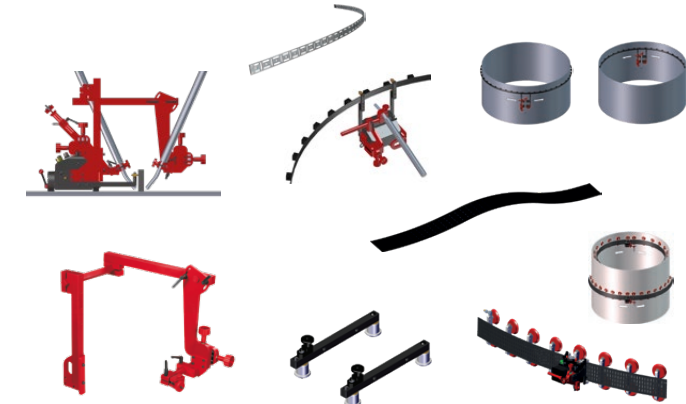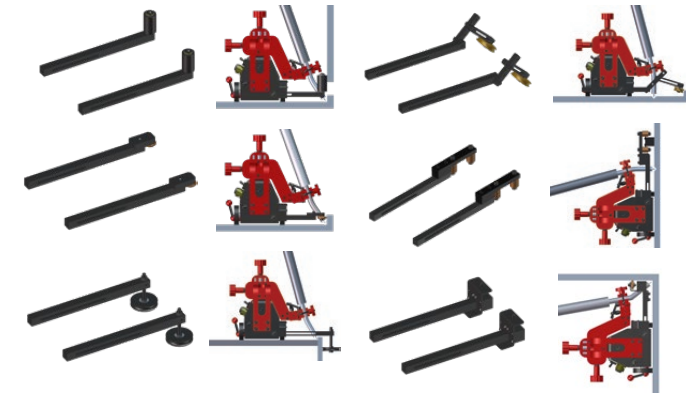

Pendulum Weave Welder OSC-8



- Pendulum oscillation
- Weight 2 kg