

PRO-36 SPECIAL DRILLS




■ PRO-36 PM2 | DRILL WITH PERMANENT MAG BASE

PRO-36 PM2 with permanent magnetic base is dedicated to operate with the risk of power loss applications (e.g. drilling in the wall).

The magnetic base is equipped with very strong neodymium magnets and does not require electricity to operate.

Switchable holding force feature enables easy and precise positioning of the drill, while magnetic base is partially engaged.

The drill can be used with convex (min diameter – 80 mm) and concave (min diameter 1000 mm) materials.



■ PRO-36 T3 | DRILL FOR THE THINNEST MATERIALS






The machine with electromagnetic base is dedicated to operate with steel profiles.

Minimum thickness of the wall can be as thin as 3 mm.

Unique design allows optimal magnetic field distribution so the holding force is comparable to the regular base placed on material which is twice as thick.

It makes it suitable to work on really thin materials.





TECHNICAL SPECIFICATIONS	PRO-36 PM2	PRO-36 T3
Motor speed (under load)	350 rpm	350 rpm
Power	1020 W	1020 W
Weight	13.2 kg (29.1 lbs)	11 kg (24 lbs)
Max milling capacity	36 mm (1 7/16")	36 mm (1 7/16")
Max drilling capacity	12 mm (0.47")	12 mm (1 9/16")
Stroke	70 mm (2 3/4")	70 mm (2 3/4")
Max depth of cut	50 mm (1 31/32")	51 mm (2")
Voltage	1~ 110-120 V, 50-60 Hz 1~ 220-240 V, 50-60 Hz	1~ 110-120 V, 50-60 Hz 1~ 220-240 V, 50-60 Hz
MFSC (Magnetic Field Shape Control)	-	yes
Magnetic base holding force	714 kgf (7 000 N)	918 kgf (9 000 N)
Magnetic base dimensions	75 mm × 188 mm × 53 mm 3.86" × 9.33" × 3.87"	100 mm × 200 mm × 38 mm 3.94" × 7.87" × 1.5"
Minimum workpiece thickness	5 mm (0.24")	3 mm (0.12") for rigid steel profiles 3 - 6 mm (0.12" - 0.24") to be careful
Tool holder	19 mm (3/4") Weldon	19 mm (3/4") Weldon
Product Code (110-120V)	WRT-0764-10-10-00-0	WRT-0440-10-10-04-4
Product Code (220-240V)	WRT-0764-10-20-00-0	WRT-0440-10-20-04-4





PRO-36 PM2 standard shipping set:

- PRO-36 PM2 drill with a cooling system bottle and a chip guard
- Plastic box
- Handle (3 pcs)
- Safety strap
- 4 mm hex wrench with a handle
- Operator's manual

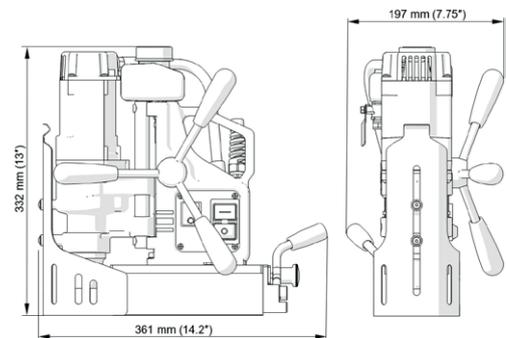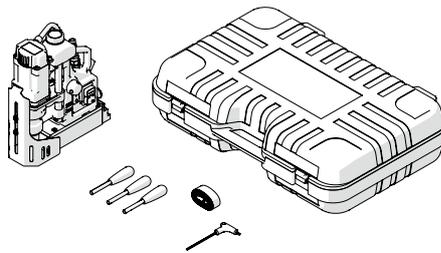

PRO-36 T3 standard shipping set:

- PRO-36 T3 drill with cooling system bottle and chip guard
- Plastic box
- Handle (3 pcs)
- Safety strap
- 4 mm hex wrench with handle
- Operator's Manual

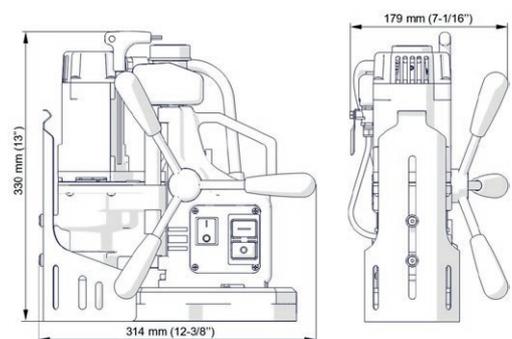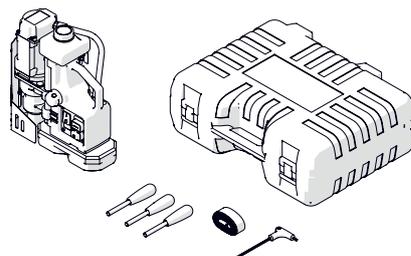

All information is subject to change without notice. 26.03



PROMOTECH Sp. z o.o.
Elewatorska 23/1
15-620 Białystok, POLAND
Phone +48 85 678 34 05
marketing@promotech.eu



Your local dealer:

